



- ❖ Operating Temperature: -40°C to +80°C
- ❖ Protection Rating: IP68
- ❖ All-plastic construction: lightweight yet robust, without adding burden to user's equipment
- ❖ Capable of delivering safe, rugged, and watertight connectivity in heavy-duty, industrial, and harsh environment applications.

CWAP-FCTS-G03S-N




- ◆ Type: Female
- ◆ Number of Contacts: 3 contacts
- ◆ Locking Mechanism: Screw locking ring
- ◆ Operating Temperature: -40°C ~ +80°C

19.90 REF



52.0 REF



CWAP-FCTS-G04P-N




- ◆ Type: Male
- ◆ Number of Contacts: 4 contacts
- ◆ Locking Mechanism: Screw locking ring
- ◆ Operating Temperature: -40°C ~ +80°C

19.90 REF



53.0 REF



CWAP-FCTS-G06P-N



- ◆ Type: Male
- ◆ Number of Contacts: 6 contacts
- ◆ Locking Mechanism: Screw locking ring
- ◆ Operating Temperature: -40°C ~ +80°C

19.90 REF



53.0 REF



CWAP-FCTS-G08P-N





- ◆ Type: Male
- ◆ Number of Contacts: 8 contacts
- ◆ Locking Mechanism: Screw locking ring
- ◆ Operating Temperature: -40°C ~ +80°C

19.90 REF




53.0 REF







3 Contacts



4 Contacts



6 Contacts



8 Contacts

Mechanical:

Contacts	Insertion Force	Withdrawal Force	Operating Life
3	25N	17N	1000 Cycles Min
4	27N	17N	1000 Cycles Min
6,8	27N	21N	1000 Cycles Min


Material:

Body Mouldings:	Polyamide
Flammability Rating:	UL94V-0
O Rings:	Silicon Rubber

Other:

Waterproof Rating:	IP68
UL Certification No.:	E542119
RoHS Compliance:	Meets RoHS Requirements

Product Nomenclature:

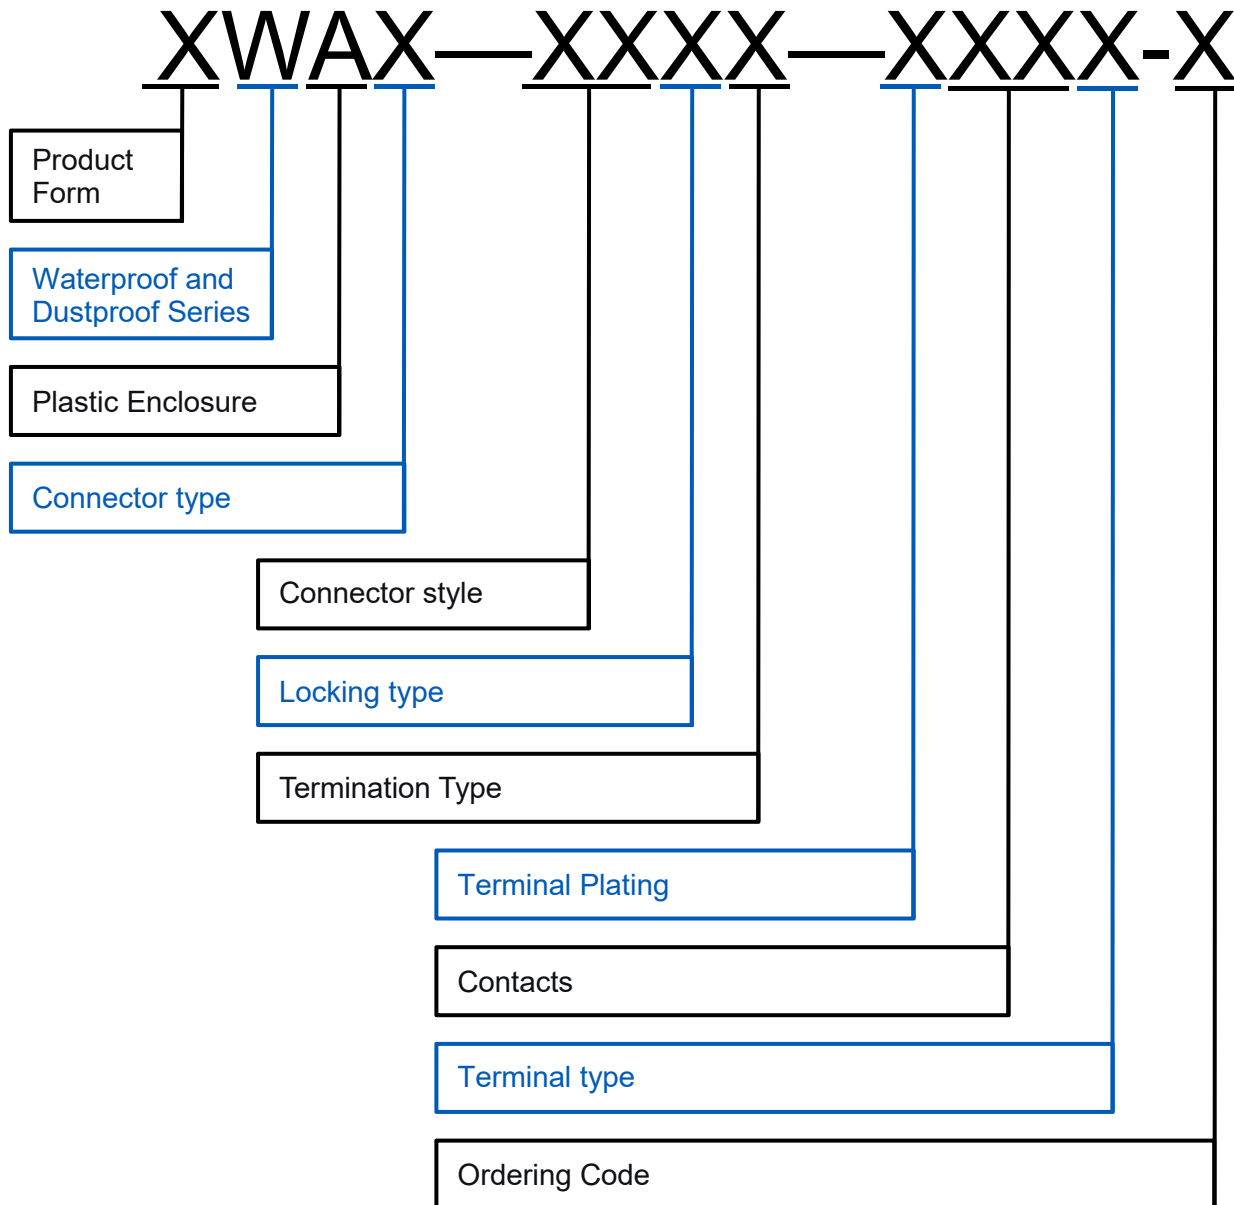

Product Form: C(circular)、R(rectangle)

Connector type: P(plug)、S(socket) 、A(accessories)

Connector style: FC(flex cable connector)、FP(front panel mounting connector)
RP(rear panel mounting connector)、AP(front or back panel mounting connector)

Locking type: B(bayonet)、T(thread)、P(push-pull)

Termination Type: C(crimp)、S(solder)、L(screw)、P(PCB through-hole)

Terminal Plating: N(nickel)、T(tin)、G(gold)

Contacts: 02、03、04、06、08……

Terminal type: S(socket)、P(pin)

Ordering Code: B(with contacts)、N(without contacts)